


PRODUCT INFO



BACK-ROLLER FREE

Rear pannier pair with roll closure and QL2.1 system

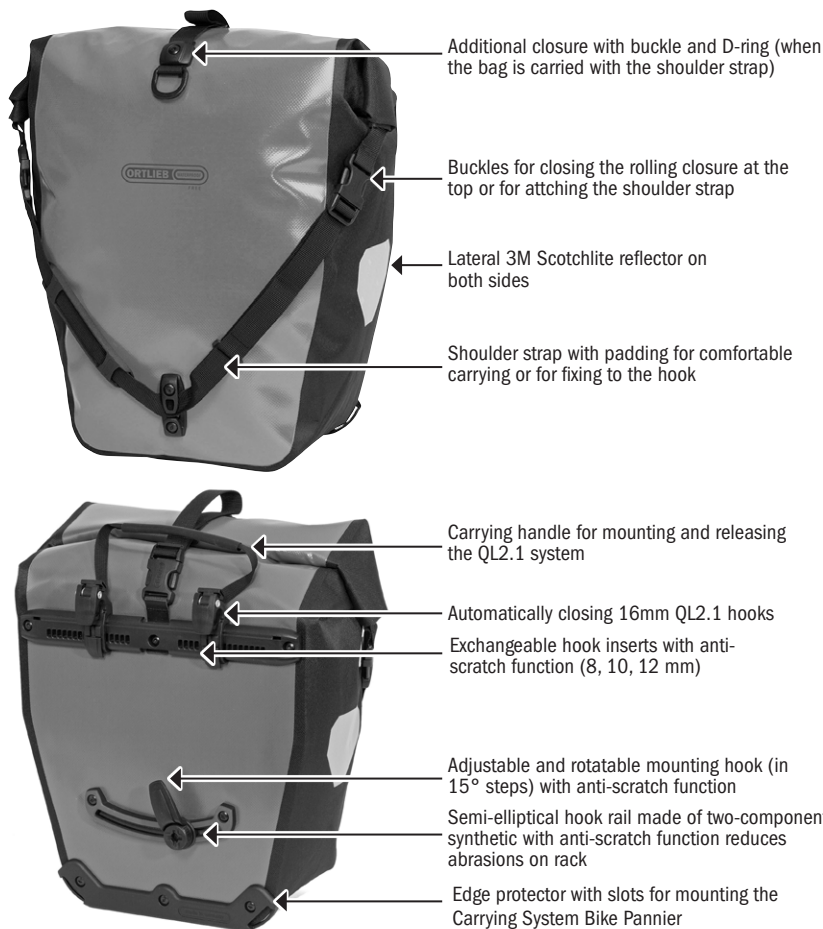

- Anti scratch
- IP 64
- PS60
- QL2.1 system
- PD62
- PVC free



Magazine My Bike Award „TIPP“ April 2019

Height cm/in	Width cm/in	Depth cm/in	Volume L/cu.in.	Weight g/oz.
42/16.5	23/32 9/12.6	17/6.7	40/2441 (pair)	1850/65.2 (pair)

SPECIFICATIONS:

- + Classical rear pannier (pair) with roll closure
- + Made of PVC-free, PU-laminated polyester fabric
- + QL2.1 system for racks up to 16 mm
- + 20 mm hook available as separate accessory (e.g. for e-bikes)
- + Including reduction pieces for tube diameters 8, 10 and 12 mm; with anti-scratch function reducing abrasions on rack
- + Top QL hooks and lower sliding hook adjustable without requiring any tools
- + Lower hook rail made of two-component „hard-soft“ synthetic reduces abrasions on carrier
- + Including integrated inner pocket and shoulder strap
- + Can be used individually (e.g. for shopping, sports, picnic)
- + Can be combined on the rack with ORTLIEB Rack-Pack size 24 L or 31 L
- + Simultaneous use of ORTLIEB Travel-Biker possible
- + Highly reflective Scotchlite reflector
- + Easy to clean inside

Contents: Panniers come as a pair with 2 shoulder straps and reduction inserts for 8, 10 and 12 mm (two pairs per size)

Optional accessories: Carrying System Bike Pannier, Anti-Theft-Device (E125), Outer Pocket 1,8 L, Mesh-Pocket, Bottle-Cage, QL2.1 hook 20 mm

Attention: Maximum load per pannier is 9kg / 20 lbs. We recommend weighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: The maximum weight capacity of every carrier model is different. Please observe the maximum weight allowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DO NOT exceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

Note: In order to meet standard IP64 (6=dustproof 4=protected against splash water coming from all directions) the lid must be rolled 3-4 times.