



BACK-ROLLER XL QL2.2

- DE MONTAGEANWEISUNG
- GB ASSEMBLY INSTRUCTIONS
- FR INSTRUCTIONS DE MONTAGE
- IT ISTRUZIONI DI MONTAGGIO
- NL MONTAGE HANDLEIDING
- DK MONTERINGSVEJLEDNING
- ES INSTRUCCIONES DE MONTAJE
- SE MONTERINGSANVISNING
- NO MONTERINGSANVISNING
- FI ASENNUSOHJEET
- PL INSTRUKCJA MONTAŻU
- JP 装着方法




ORTLIEB WATERPROOF

VIDEO

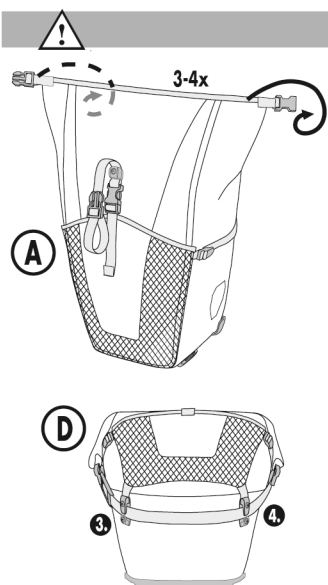






ACCESSORIES

= + Rack-Pack, Size S+M

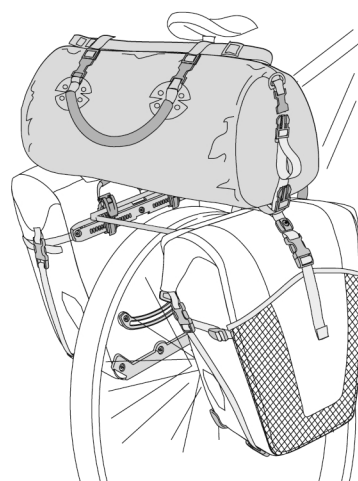

QL2.2-SYSTEM

1. ADJUST HOOK TO CORRECT TUBE SIZE

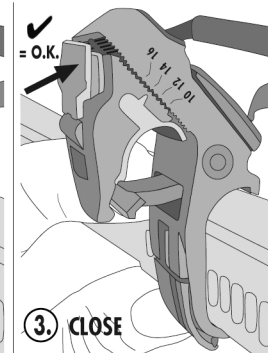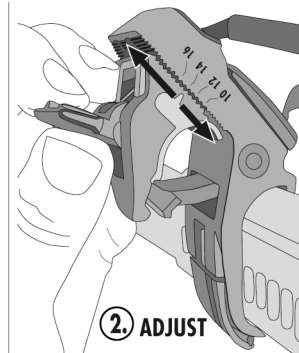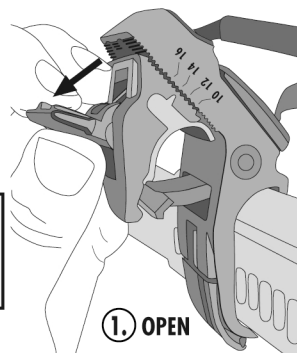
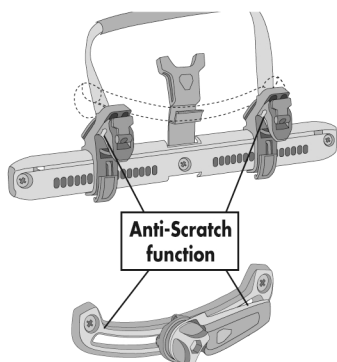


2. ADJUST HOOK POSITION



2.1 AS WIDE AS POSSIBLE

OPTIONAL: WENN DER EXZENTERHEBEL ZU FEST ODER ZU LOCKER IST, KANN DER DRUCK IM GEÖFFNETEN ZUSTAND MIT EINEM SCHRAUBENZIEHER EINGESTELLT WERDEN.

OPTIONAL: IF THE ECCENTRIC LEVER IS TOO TIGHT OR TOO LOOSE, THE TENSION CAN BE ADJUSTED WITH A SCREWDRIVER WHEN IT IS OPEN.




EXZENTERHEBEL NIEMALS IM GESCHLOSSENEN ZUSTAND ANPASSEN. NEVER ADJUST WHEN ECCENTRIC LEVER IS CLOSED.

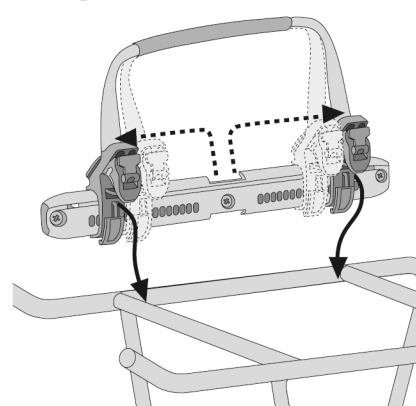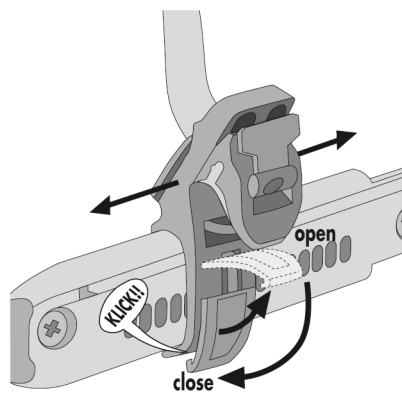


3. IMPROVE ANTI-SCRATCH

UM KRATZER ZU VERMEIDEN, BENUTZE RAHMENSCHUTZFOLIE AN DEN KONTAKTSTELLEN (nicht beinhaltet)
TO AVOID SCRATCHES, USE ADHESIVE FRAME PROTECTION AT CONTACT POINTS (not included)

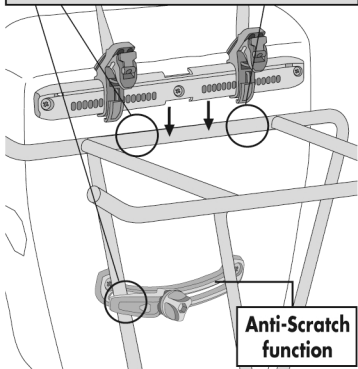


Anti-Scratch function

4. OPEN/CLOSE

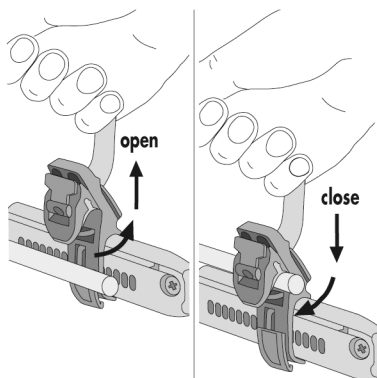


QL2.2-SYSTEM

5. CHECK SECURE CLOSURE

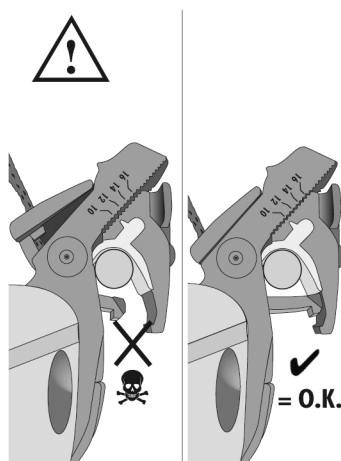


= O.K.

6. LOWER HOOK

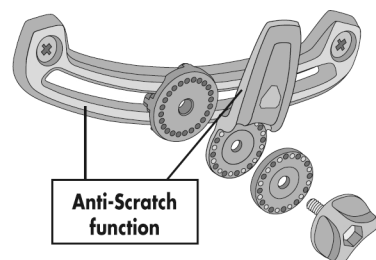


Anti-Scratch function

7. ADJUST LOWER HOOK TO TUBE SIZE

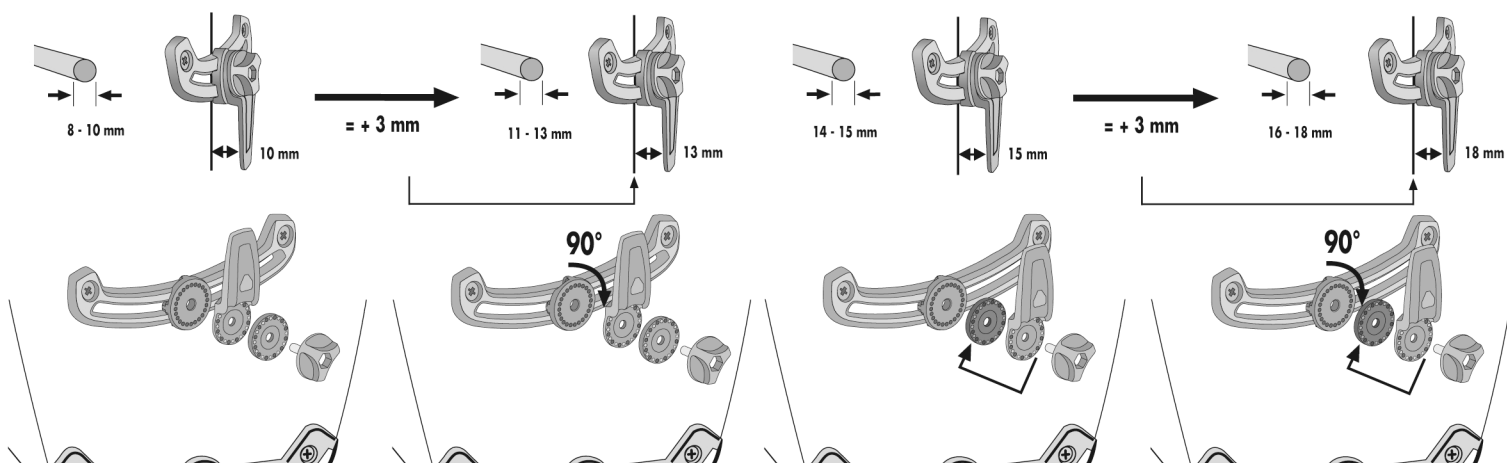


8. POSITION TOWARDS DIRECTION OF TRAVEL OPTIONAL: SWITCH DIRECTION IF NEEDED

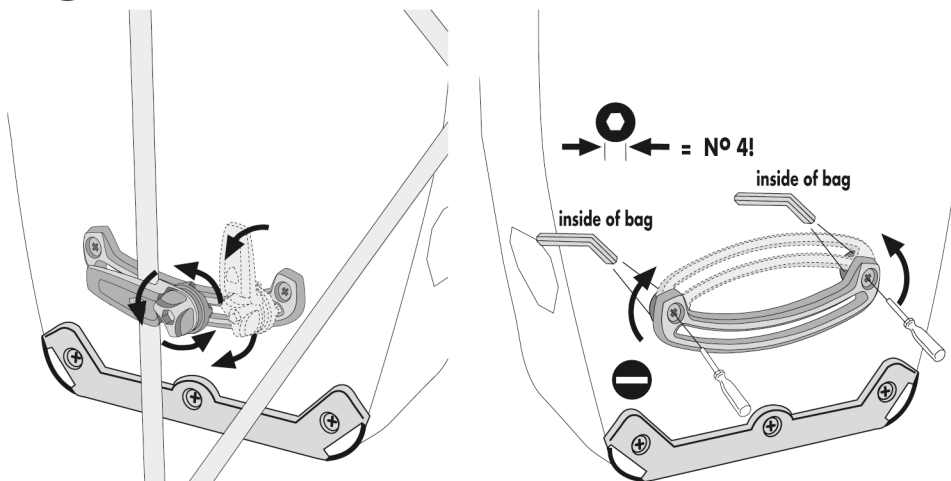


9. RETIGHTEN REGULARLY

- 1.) 100 km (60 Miles)
2.) 500 km (300 Miles)
3.) 1000 km (600 Miles)
4.) 1500 km (900 Miles)
..... etc.


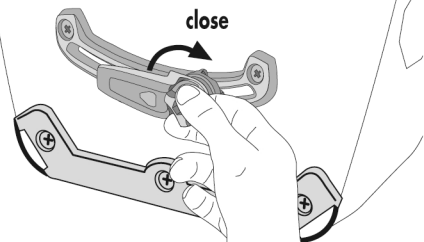


ACCESSORIES

= + Art. #E211




= + Art. #E193




= + Art. #F35



= + Art. #E125 (l)
= + Art. #E124 (s)



= + Art. #F3913

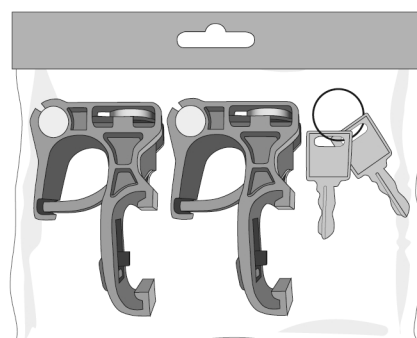

= + Art. #F3915